



ASC-08B

ASC-06

ASC-08

ASC-10

ASC-15

RE-01

RE-02

RE-03


RE-04

Ordering Code

ASC	06
Series Code	Port Size
ASC: Precision Flow Control Valve	06: G1/8"
	08: G1/4"
	10: G3/8"
	15: G1/2"

RE	01
Series Code	Port Size
RE: Standard Flow Control Valve	01: G1/8"
	02: G1/4"
	03: G3/8"
	04: G1/2"

Symbol



Specification

Model	Accurate Type				Ordinary Type			
	ASC-06	ASC-08	ASC-10	ASC-15	RE-01	RE-02	RE-03	RE-04
Port Size	G1/8"	G1/4"	G3/8"	G1/2"	G1/8"	G1/4"	G3/8"	G1/2"
Working Medium	Air							
Working Pressure	0 ~ 0.95MPa							
Ambient Temperature	-20 ~ 70°C							

* ASC-08B installation conforms to NUMAR standard to control the speed of executive unit.

Valve


J4V
J4V100
J4V200
J4V300
J4V400
Manifold
JSY
Terminal
JVT
JEL
MVSD
VF
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV

ASC, RE Series Flow Control Valve




Overall Dimension

ASC-08B

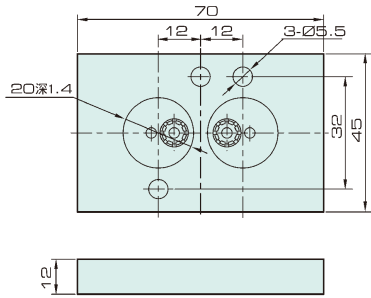

ASC Series

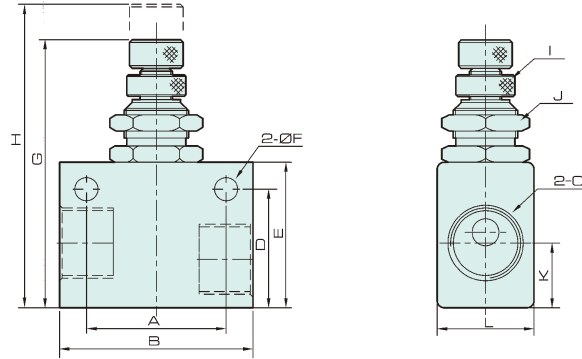


Dimension

Model	A	B	C	D	E	F	G	H	I	J	K	L
ASC-06	22	32	G1/8	22	27	4.3	49.7	56.5	M6X0.5	M12X0.75	12	18
ASC-08	26	36	G1/4	22	27	4.3	49.7	56.5	M6X0.5	M12X0.75	12	18
ASC-10	28	40	G3/8	25	30	4.3	52.7	59.5	M6X0.5	M12X0.75	13	22
ASC-15	28	40	G1/2	30	35	4.3	58.7	65.5	M6X0.5	M12X0.75	13.5	26

Overall Dimension

RE Series

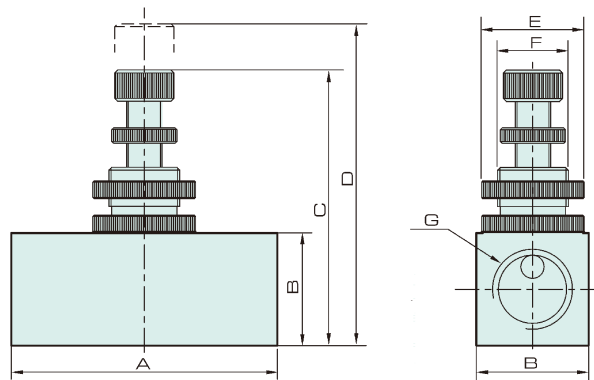

Dimension

Model / Symbol	A	B	C	D	E	F	G
RE-01	43	20	48.5	52	Φ19	M14X1	G1/8
RE-02	43	20	48.5	52	Φ19	M14X1	G1/4
RE-03	53	26	54.5	61.5	Φ25	M18X1	G3/8
RE-04	53	26	54.5	61.5	Φ25	M18X1	G1/2