


Feature

1. Brought in advanced design and improved.
2. Applied for dust clear of compressed air switch in dust cleaning system.
3. Key components materials are imported.
4. Air control type, solenoid type and anti explosion solenoid type are available.
5. Pipe type connecting ensures firmly and reliable installation.

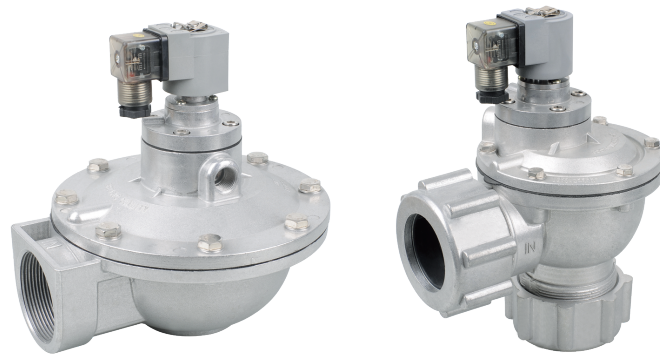


Ordering Code

JEL	Z	20	P	J
JELPC	Z: Vertical type Solenoid Pulse Valve	Bore	Connection Form	Wiring
		Ø20 Ø50	Blank Normal screw	J: Terminal
		Ø25 Ø62	A Tubing+threaded	
		Ø35 Ø76	P Screw	
		Ø40 Ø100	S Double diaphragm	
			J Threaded (economical type)	
			DD Pipe connecting type	

Specification

Model	Working-pressure	Ambient Temperature	Humidity	Applied Medium	Voltage	Diaphragm life	Orifice	Thread
JEL-Z-20A	0.3~0.8MPa	-10~55°C	< 85%		AC110V AC220V DC24V		Ø20	G3/4"
JEL-Z-20P							Ø20	G3/4"
JEL-Z-20							Ø20	G3/4"
JEL-Z-25							Ø25	G1"
JEL-Z-25P							Ø25	G1"
JEL-Z-35P							Ø35	G1 1/2"
JEL-Z-40S							Ø40	G1 1/2"
JEL-Z-50S							Ø50	G2"
JEL-Z-62S							Ø62	G2 1/2"
JEL-Z-76S							Ø76	G3"
JEL-Z-100S							Ø100	Ø100

Overall Dimension

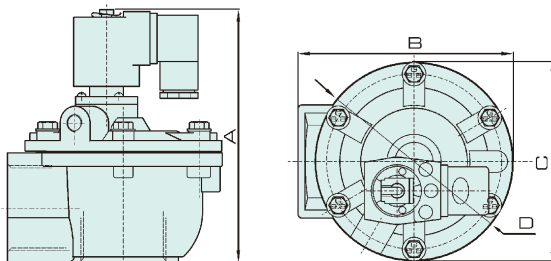

Model	JEL-Z-20A	JEL-Z-20P	JEL-Z-20	JEL-Z-25	JEL-Z-25P	JEL-Z-35P
A	173	124	110	110	124	142
B	145	105	90.5	90.5	105	121
C	-	82.5	75	75	82.5	-
D	Ø90	-	-	-	-	Ø112

Model	JEL-Z-40S	JEL-Z-50S	JEL-Z-62S	JEL-Z-76S	JEL-Z-100S
A	166	202	222	245	356.5
B	132	210	210	230.5	286.5
C	-	-	-	-	-
D	Ø137	Ø185	Ø185	Ø200	Ø221

Valve

J4V
 J4V100
 J4V200
 J4V300
 J4V400
 Manifold
 JSY
 Terminal
 JVT
 JEL
 MVSD
 VF
 NAMUR
 551
 JEL10
 3VJZF
 Diaphragm
 JELVD
 3V1
 Coil
 2P
 2V
 2W
 2W(big)
 2L
 VX
 PU
 PU225
 2Q
 JEL5404
 JEL6213
Pulse
 JELJZF
 4H
 TSV
 MPV
 4HV
 HV, K
 4R
 4F210
 FV
 MSV
 JM
 ASC, RE
 QE, QEA
 ST
 HSV