

JAR Series

1000~5000 Regulator



JAR2000




JAR4000

Ordering Code

JA	R	4000	04
Series	Function	Specification	Port Size
JAR2000-02	Regulator	1000	M5: M5 x 0.8
		2000	01: G1/8"
		2500	02: G1/4"
JAR3000-03		3000	03: G3/8"
		4000	04: G1/2"
		5000	06: G3/4"
			10: G1"

Symbol




Specification

Model	JAR1000-M5	JAR2000-01	JAR2000-02	JAR2500-02	JAR2500-03	JAR3000-02	JAR3000-03	JAR4000-03	JAR4000-04	JAR4000-06	JAR5000-06	JAR5000-10
Rated Flow	110	550	550	2000	2000	2500	2500	6000	6000	6000	8000	8000
Port Size	M5	1/8	1/4	1/4	3/8	1/4	3/8	3/8	1/2	3/4	3/4	1
Max. Adjustable Pressure	1.0 MPa											
Proof Pressure Resistance	1.5 MPa											
Range of Adjustable Pressure	5 ~ 60℃											
Range of Adjustable Pressure	0.05 ~ 0.7 MPa	0.05 ~ 0.85 MPa										
Valve Type	With Overflow											

Overall Dimension

JAF Series
1000~5000 Air Filter

JAF

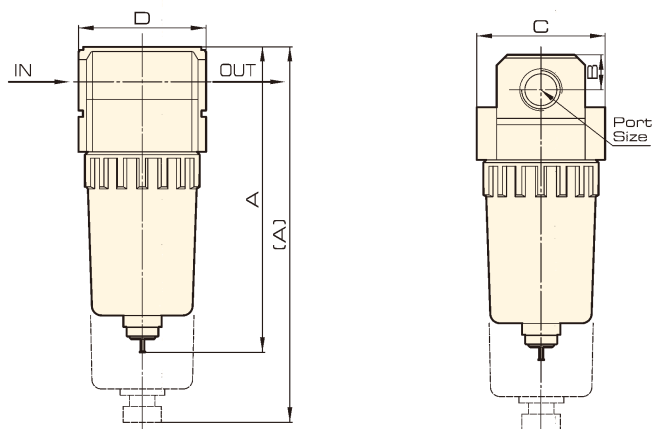


Dimension

Model	Bore	A	B	C	D
JAF1000	M5	66	7	25	-
JAF2000	1/8 - 1/4	96 (118)	11	40	40
JAF3000	1/4 - 3/8	132.5	14	53	53
JAF4000	3/8 - 1/2	168.5	18	70	70
JAF4000-06	3/4	172.5	20	70	70
JAF5000	3/4 - 1	247.5	24	90	90

Overall Dimension

JAR Series
1000~5000 Regulator

JAR

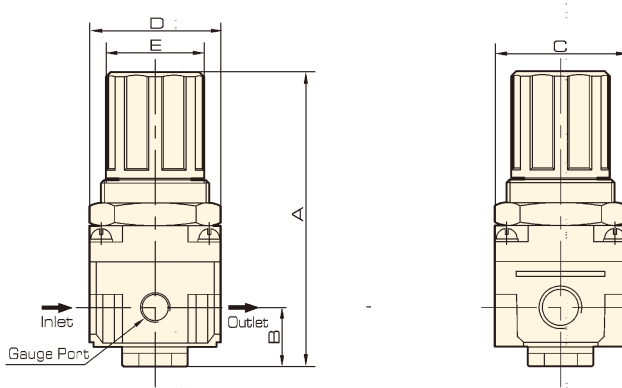

Dimension

Model	Bore	A	B	C	D	E
JAR1000	M5	61.5	11	25	25	28
JAR2000	1/8 - 1/4	95	17	40	40	34
JAR2500	1/4 - 3/8	102.5	25	48	53	34
JAR3000	1/4 - 3/8	127.5	35	53	53	40
JAR4000	3/8 - 1/2	149.5	37.5	70	70	54
JAR4000-06	3/4	154	40.5	70	75	54
JAR5000	3/4 - 1	168	48	90	90	54

FRL

AC,BC

AFC,BFC

AF,BF

AR,BR

AFR,BFR

AL,BL

JAC

JAF

JAR

JAW

JAL

FE

GC

ZYR10

JAD

MPX

EPX